


TYPE C

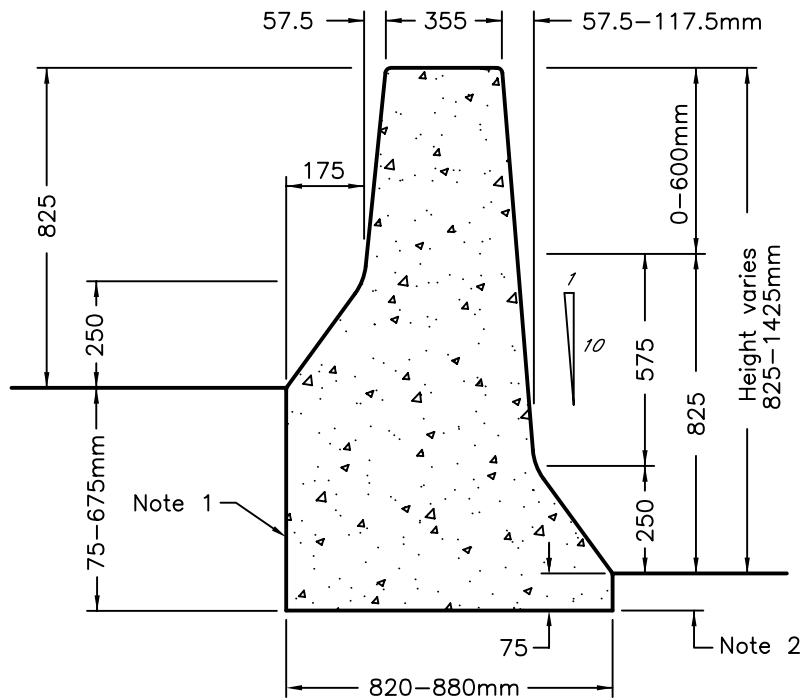

TYPE C-1  
ASYMMETRIC SECTION

NOTES:

- 1 For slipforming procedure, a 1H:20V batter is acceptable.
- 2 Embedment shall be 75mm into pavement at least 3m wide on both sides of barrier.
- A System configuration equivalent to AASHTO MASH TL-3.
- B MTOD 911.136 Type M-2 barrier shall be placed adjacent to bridge piers.
- C All dimensions are in millimetres unless otherwise shown.

MINISTRY OF TRANSPORTATION ONTARIO DRAWING	January 2018	Rev	0
GUIDE RAIL SYSTEM, CONCRETE BARRIER CAST-IN-PLACE, TYPE C INSTALLATION		-----	
		MTOD 911.131	