


NOTES:

- 1 Vertical clearance shall be 0.2m to 0.3m at location shown.
- 2 Pavement crossfall 2.0% or greater as specified.
- 3 Gates may overlap in closed position to decrease distance between footings.

- A This drawing shall be read in conjunction with MTOD 960.101.
- B Gates may be installed in front of guide rail when specified.
- C All dimensions are in millimetres or metres unless otherwise specified.

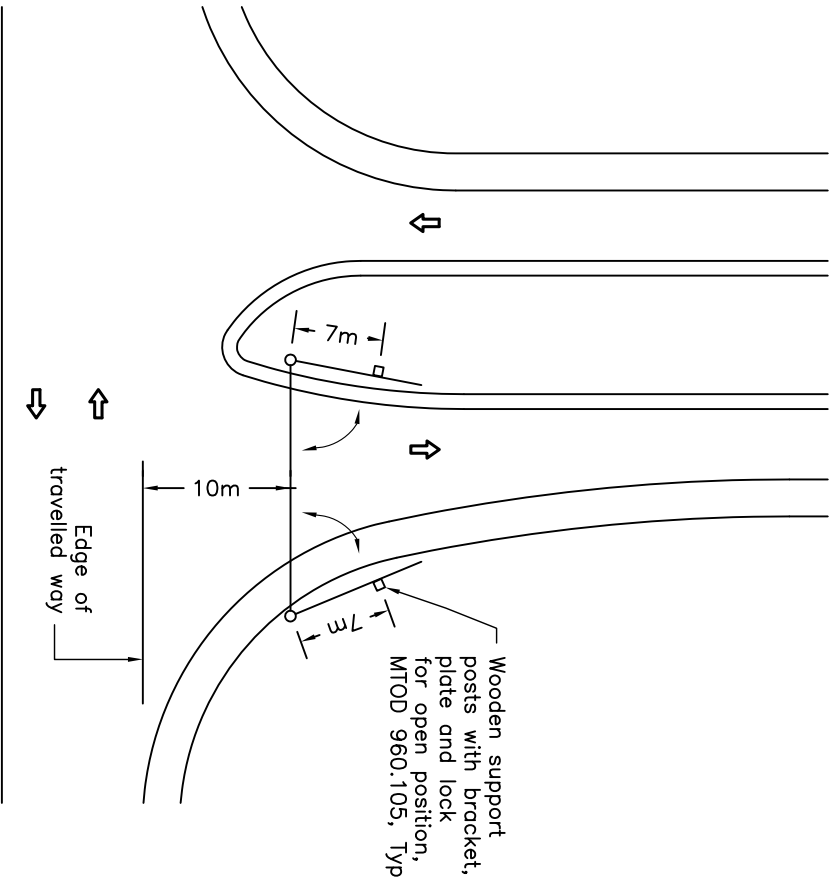

MINISTRY OF TRANSPORTATION ONTARIO DRAWING		May 2013	Rev 0
RAMP CLOSURE GATES			
ENTRANCE RAMP TO FREEWAY			
TWIN 9m GATES – INSTALLATION			
MTOD – 960.011			