


Cond #	Colour/Mark	Cable Group 1	Cable Group 2
1	White	Neutral	Neutral
2	Black	Note 1	Note 1
3	Orange	Note 1	Note 1
4	Red/Red One	Main Rd. Red	Main Rd. Red
5	Red/Red Two	Side Rd. Red	Side Rd. Red
6	Red/Red Three	Spare	Spare
7	Yellow/Amber One	Main Rd. Amber	Main Rd. Amber
8	Yellow/Amber Two	Side Rd. Amber	Side Rd. Amber
9	Yellow/Amber Three	Note 1	Note 1
10	Blue/Green One	Main Rd. Green	Main Rd. Green
11	Blue/Green Two	Side Rd. Green	Side Rd. Green
12	Blue/Green Three	Note 1	Note 1

NOTES:

- 1 When arrow advance greens are used, use conductor #12 Blue/Green Three and conductor #9 Yellow/Amber Three for the Main Road heads; and conductor #2 Black and conductor #3 Orange for the Side Road heads.
- A Connections shown are general and typical and shall be adjusted to suit intersection layout.
- B For legend see OPSPD 2529.010.
- C For pedestrian facilities see OPSPD 2529.010.
- D The system shown requires ducts all around the intersection.

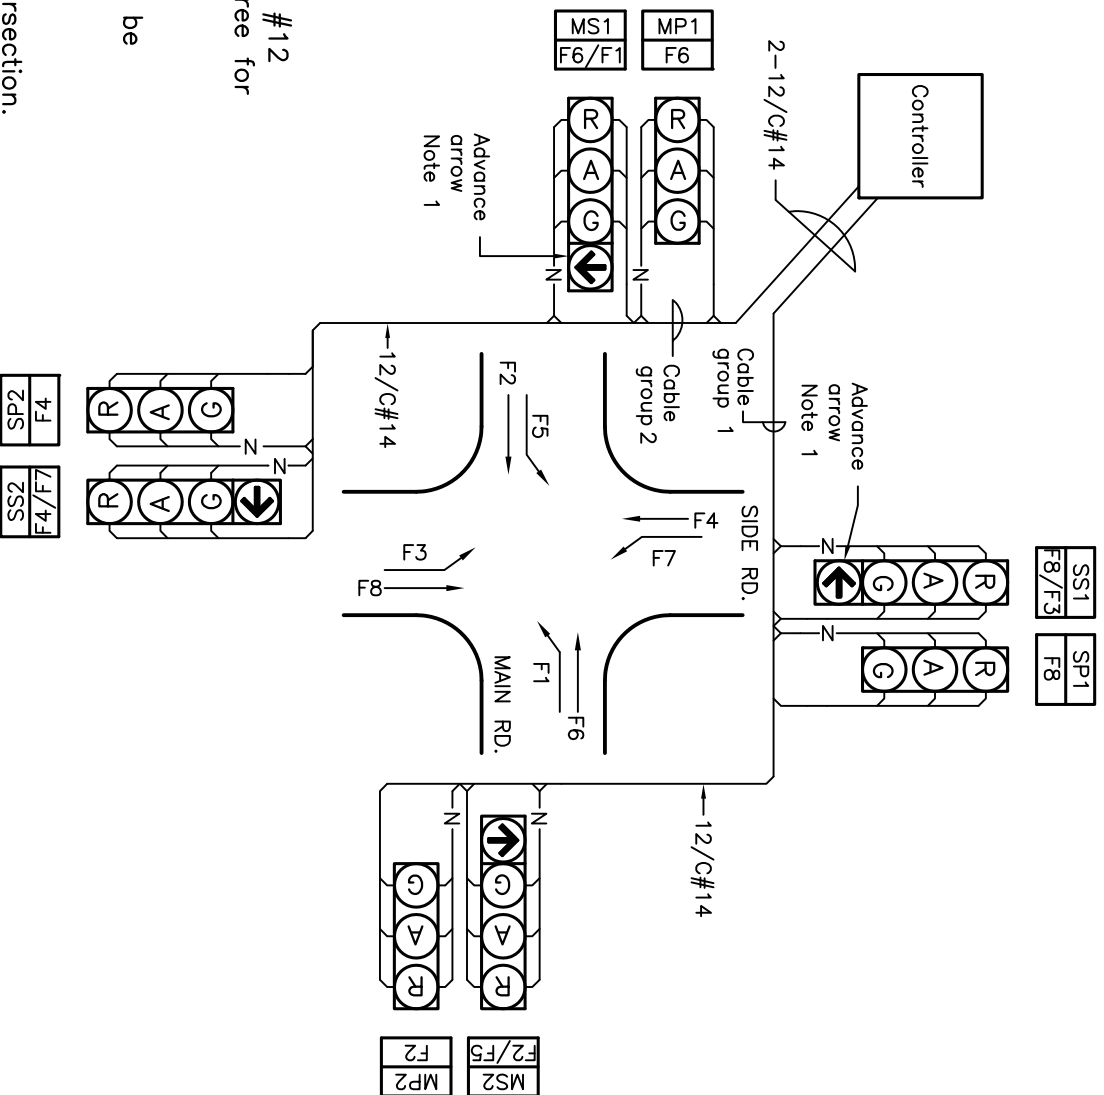

ONTARIO PROVINCIAL STANDARD DRAWING

SIGNAL WIRING

USING 12/C CABLE TAPPED,
2 TO 8 PHASE

Nov 2012 Rev 0



OPSPD 2529.030