



FULLY DEPRESSED

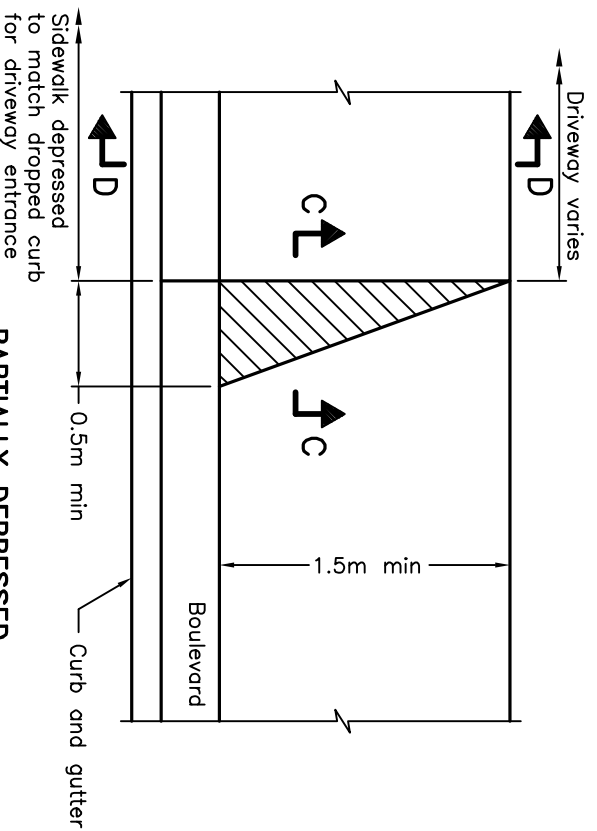


PARTIALLY DEPRESSED

PLAN

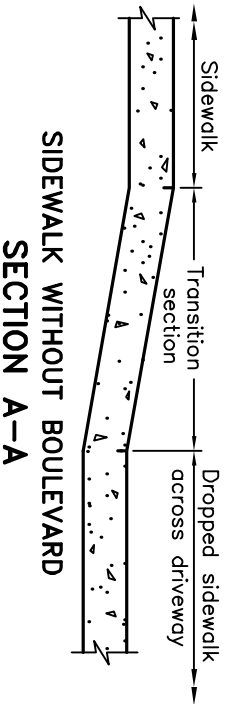


**SIDEWALK WITHOUT BOULEVARD
SECTION A-A**

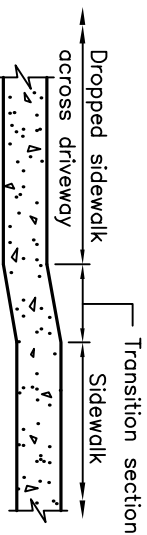

**SIDEWALK WITH BOULEVARD
SECTION C-C**



SECTION B-B

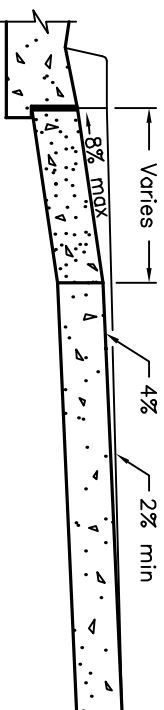

SECTION D-D

NOTES:

- 1 At commercial and industrial driveways, the thickness shall be 200mm.
- A For contraction joint detail, see OPSD 310.010.
- B All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2015

Rev 2

**CONCRETE SIDEWALK
DRIVEWAY ENTRANCE DETAILS**

OPSD 310.050

